

RSC4030

Swing Arm Tire Changer



RockSolid

Equipment

ROCK

DUAL ROBO ARMS
2 YEAR WARRANTY
XL CHASSIS
STORAGE TRAY
ADJUSTABLE JAWS
HAND ACTUATED
BEAD BREAKER

SOLID

Specifications

- Ext. Rim Size: 12"-28"
- Int. Rim Size: 14"-30"
- Rim Width: 15"
- Max Tire Diameter: 49"
- Motor: 0-13 RPM (Variable Speed)
- Electrical: 110V AC
- CSA Approved
- 885 ft. lbs Turntable Torque



rocksolidequipment.ca


STANDARD FEATURES




• Built in Air Inflation System



• High strength steel head with plastic inserts

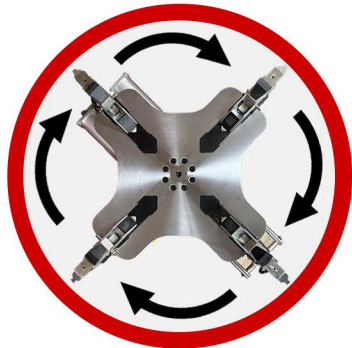

• Variable Speed Turntable 0-13 RPM

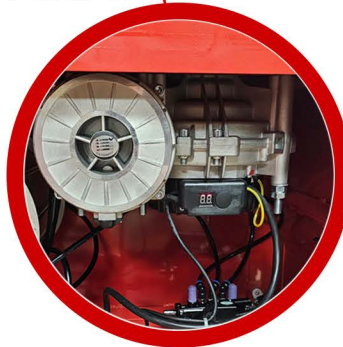

• Direct Drive (No belt) technology


• 110V Single Phase High-Torque motor

• Dual Robo Assist Arms



Built in bead blast system w air storage tank

• Adjustable Position Jaws 28" External Clamp

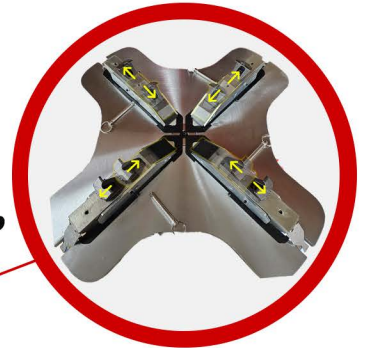

• Hand operated bead breaker shovel



OPTIONAL FEATURES



Wheel Lift



Nylon Mount/demount Head Kit



Motorcycle Adapters